



PROPANE AUTOGAS

FOR TRANSIT AGENCIES




REDUCES

Fuel Costs Emissions Maintenance Costs Total Operating Costs

Ford E-450 7.3L V8



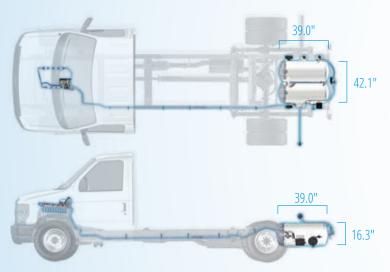

ENGINE SPECS




Horsepower	335 hp at 3,900 rpm
Torque	468 lb-ft at 3,900 rpm
Transmission	TorqShift [®] 6-speed transmission
Wheelbase	158" / 176" / 186" / 190" / 208"
GVWR	E-450 DRW – 14,500 lbs

TANK SPECS

Aft-Axle Fuel Tank	
Capacity	41 usable gallons
Length	39.0"
Width	42.1" (16" diameter tank)
Height	16.3"
Number of Tanks	1 (dual manifold)
Tank Location	Aft-Axle (rear)
Assembled Weight	138 lbs‡



Capacity	64 usable gallons
Length	53.0"
Width	41.66"
Height	16.3"
Number of Tanks	1 (dual manifold)
Tank Location	Aft-Axle (rear)
Assembled Weight	398 lbs‡

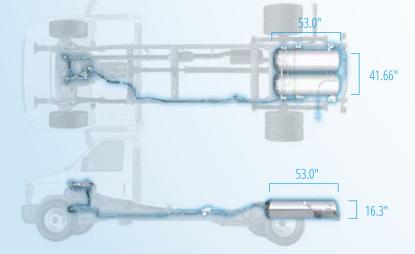

Ford F-650 / F-750 7.3L V8




ENGINE SPECS

Horsepower	335 hp at 3,900 rpm
Torque	468 lb-ft at 3,900 rpm
Transmission	TorqShift [®] 6-speed automatic
Gaseous Prep Engine Code	98G
GVWR	Up to 33,000 lbs
TANK SPECS	

Driver's Side Fuel Tank

Capacity	50 usable gallons
Length	86.0"
Width	22.3"
Height	19.8"
Number of Tanks	1
Tank Location	Driver side
Assembled Weight	367 lbs‡

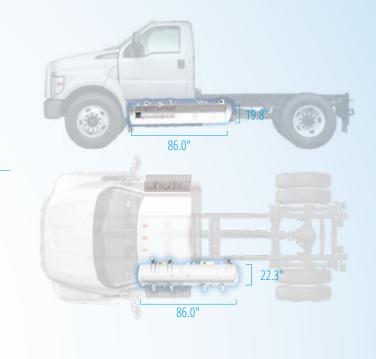

For those looking for more range, additional options are available: dual short tanks (54 usable gallons), dual long tanks (83 usable gallons).



"With a propane fueling infrastructure, propane is the most cost-effective alt fuel system. Our total net cost by switching to propane away from gasoline is about \$8.2 million over the

last five years, and that doesn't include additional Florida incentives we received."

— Paul Strobis, Director of Paratransit, Broward County Transit

"Our first five propane-fueled buses collectively traveled 450,000 miles with no fuel system-related failures, and saved \$15,000 in fuel costs



alone. That, combined with the reduction in greenhouse gas emissions, made it an easy decision to expand the propane program with our new private fuel stations and propane fleet."

— John T. Sisson, CEO, Delaware Area Regional Transit

FUEL RAIL

Our signature aluminum fuel rails operate under the varying temperatures of liquid propane autogas.

FRPCM

The fuel rail pressure control module improves vehicle start-up times, lowers start-up emissions and provides consistent power.

FUEL TANK

The fuel tank meets ASME certification standards. It's built 20 times more puncture-resistant than gasoline tanks and is made in the U.S.

Ford E-450 7.3L V8

FUEL FILL

The design of the industry-standard valve allows for safe passage of liquid propane autogas into the vehicle. It also includes a check valve to prevent fuel leaks.

FUEL LINES

Made of high-durability stainless steel to handle varying temperatures and pressures and designed to route through the factory line locations.

FUEL INJECTORS

Special fuel injectors inject liquid propane autogas into the engine for ignition.

RECALIBRATED PCM

We reprogram Ford's on-board computer that controls the engine to allow the vehicle to operate properly on propane autogas.

CERTIFICATION & COMPLIANCE



CARB







The ROUSH CleanTech propane autogas Ford E-450 has passed through the **Altoona Bus Testing Program** to give you options on how to pay for the capital expense. For transit agencies, that means you can use FTA and state capital funds to purchase your propane autogas equipped vehicles, freeing up your operating budget for what it was meant for — operations.



ROUSHcleantech.com